

# Crimp Housing




### Specifications:

Current Rating : 3A AC/DC  
 Voltage Rating : 250V AC/DC  
 Contact Resistance : 15mΩ Min.  
 Insulation Resistance : 1000MΩ Min.  
 Withstanding Voltage : 600V AC/minute  
 Temperature Range : -25°C to +85°C

### Material

Insulator : Noryl (UL94V-1)

### Diagram:

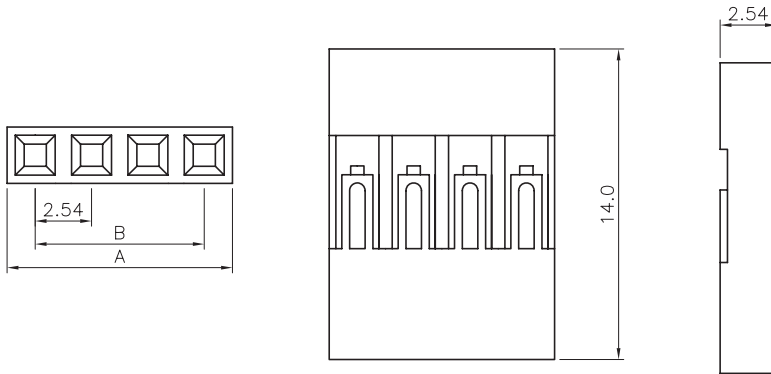

### Dimensions

Part Number	Circuits/Ways	Dimension	
		A (mm)	B (mm)
2226A-02	2	5.28	2.54
2226A-03	3	7.82	5.08
2226A-04	4	10.36	7.62
2226A-05	5	12.9	10.16
2226A-06	6	15.44	12.7
2226A-08	8	20.52	17.78
2226A-10	10	25.6	22.86

Part Number	Circuits/Ways	Dimension	
		A (mm)	B (mm)
2226A-12	12	30.68	27.94
2226A-14	14	35.76	33.02
2226A-18	18	45.92	43.18
2226A-20	20	51	48.26
2226A-22	22	56.08	53.34
2226A-24	24	61.16	58.42

### Notes:

A and B Dimension Tolerance:

- 2P to 10P : ±0.1
- 11P to 20P : ±0.2
- 21P to 30P : ±0.3

# Crimp Housing



## Part Number Table

Description	Part Number
Connector Housing, Receptacle, 2 Ways	2226A-02
Connector Housing, Receptacle, 3 Ways	2226A-03
Connector Housing, Receptacle, 4 Ways	2226A-04
Connector Housing, Receptacle, 5 Ways	2226A-05
Connector Housing, Receptacle, 6 Ways	2226A-06
Connector Housing, Receptacle, 8 Ways	2226A-08
Connector Housing, Receptacle, 10 Ways	2226A-10
Connector Housing, Receptacle, 12 Ways	2226A-12
Connector Housing, Receptacle, 14 Ways	2226A-14
Connector Housing, Receptacle, 18 Ways	2226A-18
Connector Housing, Receptacle, 20 Ways	2226A-20
Connector Housing, Receptacle, 22 Ways	2226A-22
Connector Housing, Receptacle, 24 Ways	2226A-24

