


# USB 2.0

**RoHS  
Compliant**



**Specifications:**

Insulation Resistance : DC 300V, 10MΩ  
 Contactor Resistance : 3Ω Max.  
 Dielectric Strength : 100V AC/Minute, 1mA  
 Printing : USB 2.0 Cable, 28AWG × 1P + 28AWG × 2C

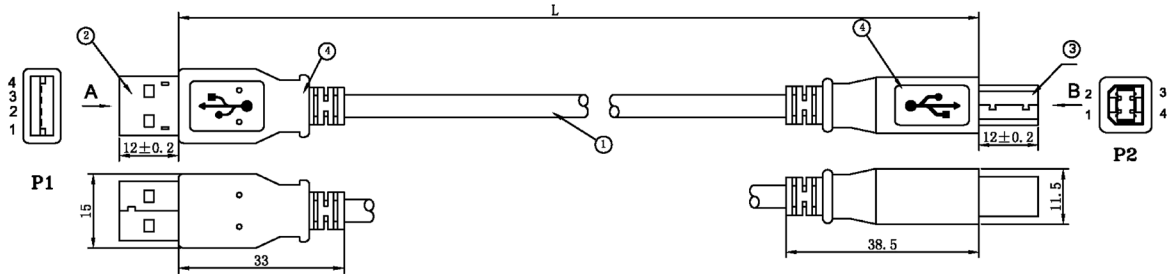

Dimensions : Millimetres

L = 3,000mm

No.	Parts	Standard Specification	QTY
1	Cable	USB 2.0AWG (7/0.12BC × 1P) + 28AWG (7/0.12BC × 2C) +AB B=0.12/3 × 16 AL-MG Jacket : PVC/White OD : 4mm, Braid Coverage : 48%	1
2	USB A Type	USB A/M Type, The Pin Gold Plating 30μ", the shell for Nickel Plating	1
3	USB B Type	USB B/M Type, The Pin Gold Plating 30μ", the shell for Nickel Plating	1
4	Outer Mold	Shore 88A PVC Colour : White	2

**Part Number Table**

Description	Part Number
Computer Cable, USB2.0, 3m, White	11.99.8831