

Cable Assembly



Specifications:

Connector Type A	: USB 3.0 Type A
Connector Type B	: USB 3.0 Type B
Cable Assembly Type	: USB 3.0
Cable Length - Imperial	: 5.91ft
Cable Length - Metric	: 1.8m
Jacket Colour	: White

Cable	: [#28 (7/0.127 T.C) × 1P INS : Foam-PE + D.W (7/0.127 T.C) + AL/MY + Hot-melt-mylar] × 2C + #28 (7/0.127 T.C) × 1P INS : Polyolefin + #28 (7/0.127 T.C) × 2C INS : Polyolefin + AL/MY + B.D (85%)
Jacket	: PVC
Outer diameter	: 5.2 ± 0.15mm
Connector	: P1 : USB 3.0A type male 9 PIN Contact : 30μ inches, Shell : Ni-plated P2 : USB 3.0B type male 9 PIN Contact : 30μ inches, Shell : Ni-plated
Hood	: Moulded type, PVC 45P, Colour : White (NK-K01)


Electrical Test:

100% Open short and MIS wire test

Max. contact resistance : 3mΩ

Min. insulation resistance : 10MΩ


HI-POT 300V dc

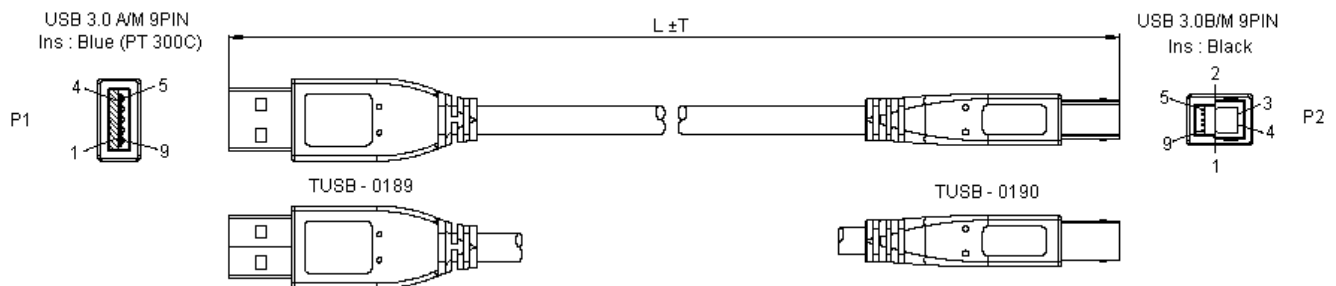

Dimensions : Millimetres

Cable Assembly

PIN Out

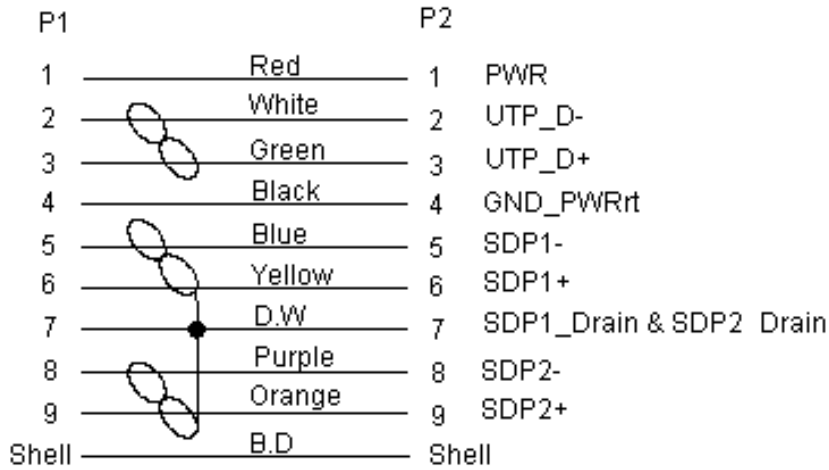

Part Number Table

Description	Length (mm)	Tolerance (mm)	Part Number
Cable Assembly, USB 3.0, Type A to B, 1.8M	1800	30	11.99.8870
Cable Assembly, USB 3.0, Type A to B, 3M	3000		11.99.8871